T-Styles
4 Way Switch Wiring
Bridge and Neck in Series

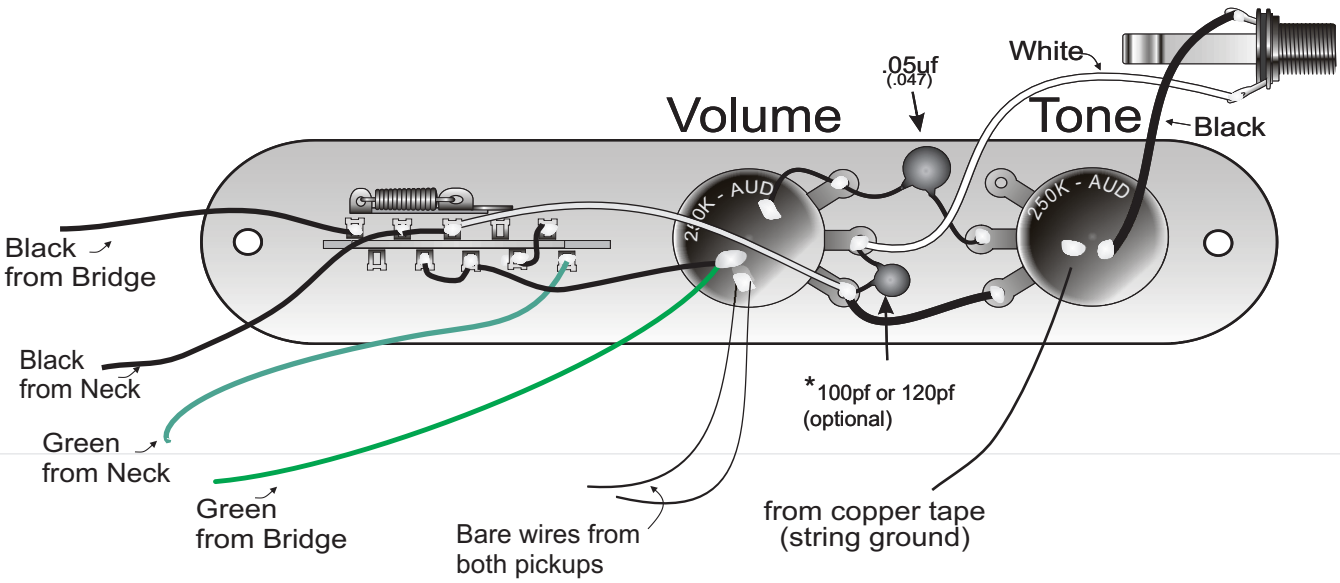

Use the hardware provided to mount both pickups. The neck pickup can be mounted directly into the body using the 1” coarse-thread screws (vintage style), or suspended from the pickguard using the 6-32 x 5/8” machine screws (on newer guitars, the pickguard holes may need to be enlarged for the 6-32 screw). Both types of screws are provided.

*

Red & White wires are soldered together and insulated with heat shrink. For typical Tele-style operation do not disturb this connection.

Keep the bare wires from contacting other connections. Wrap with heat shrink!

* This optional capacitor helps compensate for the natural loss of high frequencies through the guitar cord which sometimes occurs when the volume control is partially rolled back.

2012 JBE Pickups™